

SUNMI T3 PRO Smart Desktop Terminal

The next level of Android desktop.



Flagship performance unlocks extraordinary user experience.

High performance octa-core 6nm processor, up to 2.7Ghz. Equipped with large-capacity memory of 6GB RAM+128GB ROM delivers premium-tier features.

Pioneering in engineering.

The sleek yet durable aluminum alloy design strikes the perfect balance between weight, ruggedness and outlook. Bezel-less high definition display, comes with high-transparency anti-fingerprint coating.

Interactive design for an ultimate user perception.

Designed with NFC tab on screen for both the main screen and customer facing screen (optional). Easily detachable customer display that comes with a 1.5m extension cord to improve flexibility.

Have your device tailored to your brand.

Apply your logo and brand color to the device to show your brand personality.



Display Options

15.6" +10.1"

Main 15.6" FHD, 1920*1080
Secondary 10.1" HD, 1280*800



15.6" +15.6"

Main 15.6" FHD, 1920*1080
Secondary 15.6" FHD, 1920*1080




15.6"

Single 15.6" FHD, 1920*1080



Flipable Main Display



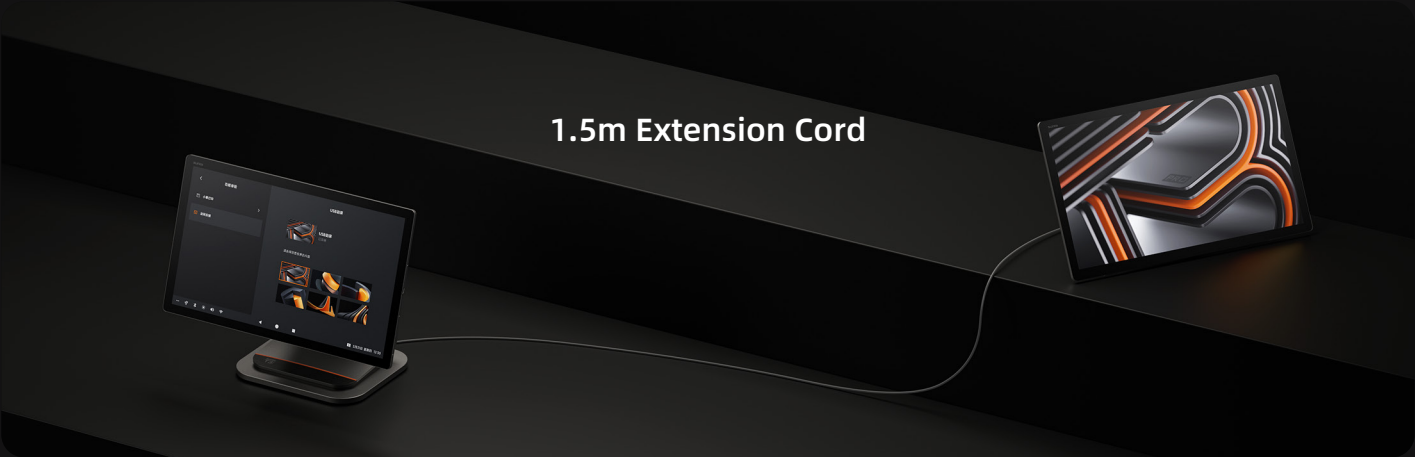

1.5m Extension Cord



Hidden Cabling



Aluminum Alloy Design

SUNMI T3 PRO Tech Specs

Product Model L15B1	OS SUNMI OS (based on Android 13)	CPU Kyro-670 Qualcomm cota-core up to 2.7GHz	Memory 6GB RAM+128GB ROM	Display 15.6" FHD 1920*1080 400nits, anti-fingerprint (AF)
Camera Front camera, single lens, 8MP	Card Reader NFC under the screen	External Memory 1*MicroSD (TF card) Up to 2TB supported	Speaker 2* 2W	Network LAN 1000M
Wi-Fi 2.4GHz & 5GHz & 6GHz IEEE 802.11 a/b/g/n/ac/ax supported	Bluetooth Bluetooth 5.2 and BLE supported BT Long Range (farthest distance 200m) supported	Indicator Light Power indicator light	Buttons 1*Power button (lock screen and fingerprint recognition 1*Download button (hidden hole)	Ports 3*USB 2.0 Type A port 1*USB 3.0 Type A port 1*USB Typc C 2*Micro USB port 1* Micro-USB debug port 1*RJ45 1*RJ11 1*RJ12 1*DC
Accessories 15.6" separate monitor, FHD 1920*1080 10.1" separate monitor, HD 1280*800	Power Adapter Input: AC 100~240V/1.7A Output: DC 24V/2.5A	Dimensions (L*W*H) 298mm*371.5mm*170mm	Weight T3 PRO: 3.3kg 15.6" separate monitor: 1.7kg 10.1" separate monitor: 0.9kg	Environment Operating temp.: 0°C~40°C Storage temp.: -20°C ~ 60°C

*Data regarding dimension and weight tested internally at SUNMI labs, actual results may be slightly different according to different measurement methods.